
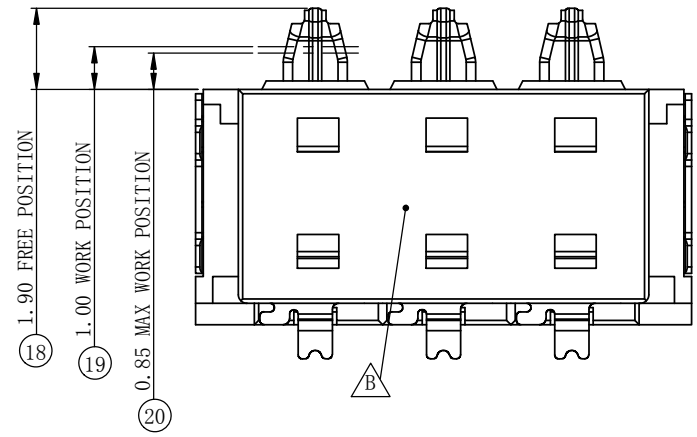
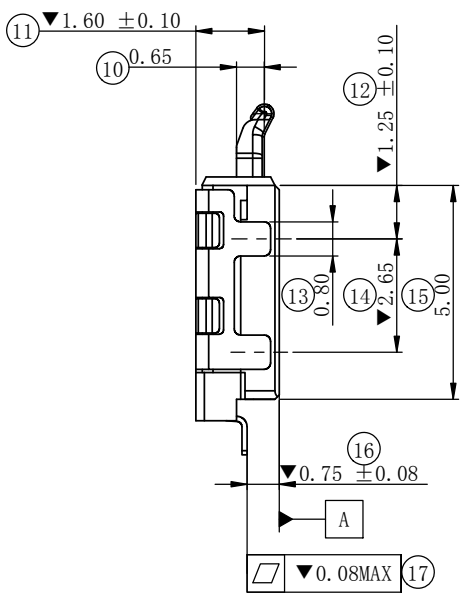


P. C. B. LAYOUT
TOLERANCE: ±0.05

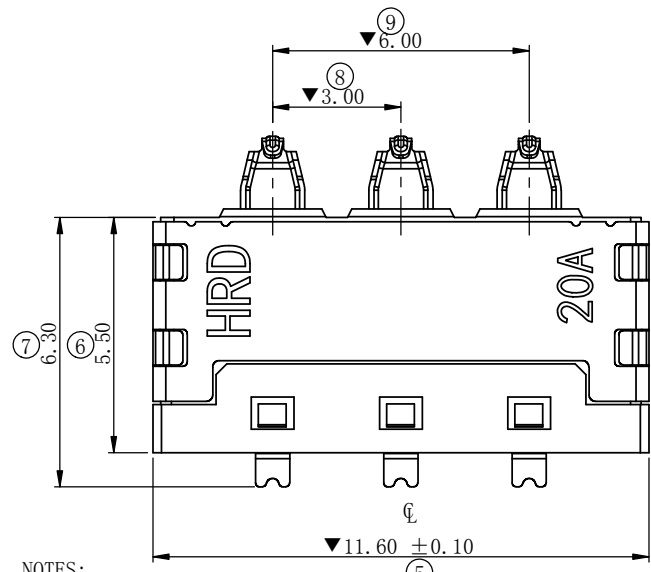

- NOTES:
- MATERIAL:
BODY:HI-TEMP. PLASTIC, BLACK, UL 94V-0
TERMINAL:COPPER ALLOY, T=0.12mm
SHELL:STAINLESS STEEL T=0.15mm
 - FINISH:
TERMINA:50u" MIN Ni UNDERPLATING OVERALL
GOLD FLASH ON CONTACT AREA
TIN 60-200u" PLATED ON SOLDERTAIL AREA
SHELL:50u" MIN Ni UNDERPLATING OVERALL
GOLD FLASH ON SOLDERTAIL AREA
 - ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC
 - ALL DIMENSIONS MARKED ⊗ MUST BE MEASURED BY FAI.

				UNITS: mm	GENERAL TOLERANCE		DRAW:	PART NO: B61-AB03F20A
				DATE: 05/04/2016	X. ±0.20	X' ±2.00'	CHECKED:	TITLE: 总高度2.00H 板上 1.20H 测压式电池座
				SCALE: 8:1	.XX ±0.10	.XX' ±0.50'	APPROVE:	DRAWING NO:
B	E1606246A	更新图面	06/28/2016	SHEET: 1/1	MATERIAL:		昆山捷皇电子精密科技有限公司 HONGRIDA ELECTRONIC TECHNOLOGY CO., LTD.	
REV.	ECN NO.	DESCRIPTION	DATE	REV. A	FINISH: SEE NOTE			